

# Circular straight low-built silencer


# LRCA



## Description



Silencer with low installation height. LRCA has a bowl-shaped mineral wool insulation with a fibre cloth in order to prevent tear off mineral wool. Can achieve maximum tightness class C.

## Dimensions

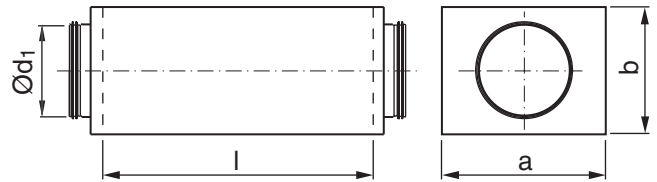

Ød <sub>1</sub> nom	l mm	a mm	b mm	Attenuation [dB] centre frequency [Hz]								m kg
				63	125	250	500	1k	2k	4k	8k	
100	500	210	158	8	12	12	23	44	45	30	18	3,17
100	1000	210	158	17	18	25	41	50	50	50	32	5,55
125	500	239	181	8	9	11	21	36	36	23	14	3,85
125	1000	239	181	17	14	21	38	50	50	45	23	6,89
160	500	275	218	6	7	10	18	28	24	13	10	4,40
160	1000	275	218	9	10	19	36	50	49	24	17	7,90
200	500	328	254	5	6	9	16	22	17	7	7	5,74
200	1000	328	254	11	13	15	30	46	36	14	12	10,1
250	500	390	308	5	4	8	16	19	13	6	6	7,24
250	1000	390	308	11	7	14	31	41	26	12	9	13,0
315	500	453	372	3	4	7	13	15	8	4	5	9,15
315	1000	453	372	8	8	13	26	33	18	9	9	16,4
400	500	546	460	2	3	6	10	10	5	5	5	12,7
400	1000	546	460	6	6	12	20	24	11	7	8	21,6

## Technical data

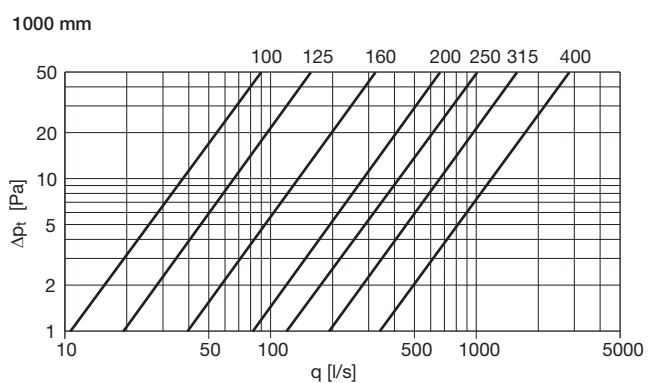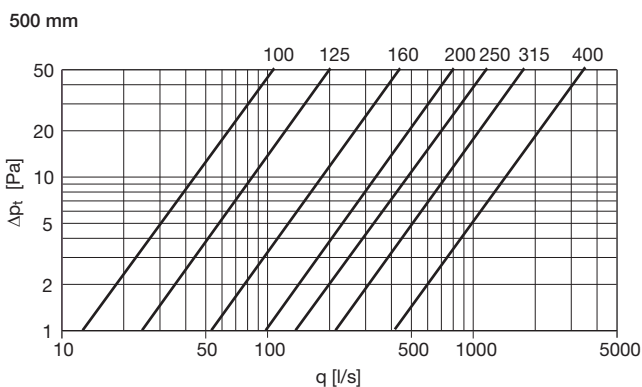

## Ordering example

